

CLOU enlarges with **unlimited creative solutions the outdoor light**. A **bollard, wall** or **ceiling** element, CLOU is designed to illuminate green areas and semi-open spaces with a modern and brilliant design. The structure is composed by an extruded petal profile with three grooves, where you can install silicone strip that, combined with spots, grant you to play in an amazing way with the light. Moreover, an overlapping junction can be applied to CLOU body to allow you to **create a dynamic weaving profile with different directions in the space** to obtain an even more refined and **personalized lighting composition**.

☑ Features

- IP 66
- IK 06
- -20°C/+40°C

💡 Led

- 3000K
- >108 lm/W; >120 lm/W
- CRI>90
- Eye safety: RG0/RGI
- Mac Adams 3
- L80/B10 >50.000h

📏 Specifications

- Pc lens, beam angles: 15°-50°
- Silicone strip 7W/m

📦 Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK
- Corten Bronze - code BC
- Green RAL 6036 - code VR

★ Certifications



- CE Conformity
- Energy efficiency D
- 5 years warranty

📄 On request

- 2700K - code K27*
- 4000K - code K4*


* Where available



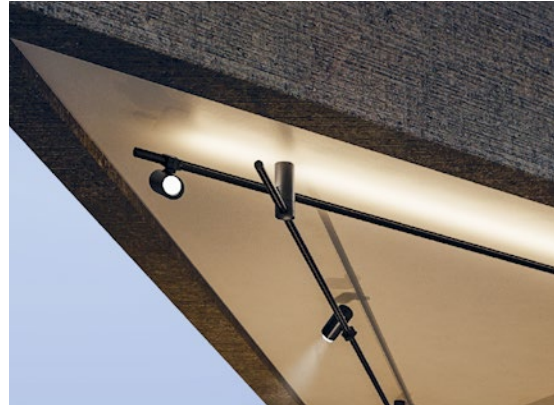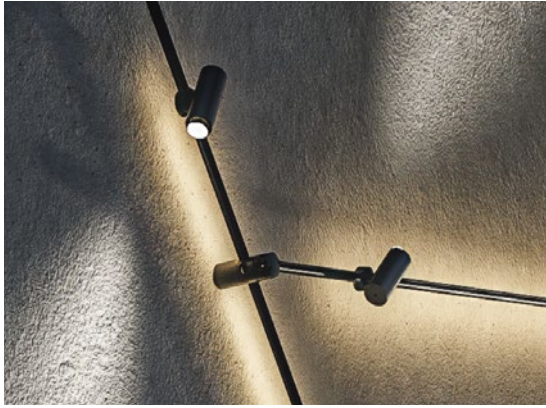

CLOU ARM

Extrudel aluminum profile.




IP 66

Cod.	Lmm
59AA700	700
59AA1000	1000
59AA2000	2000
59AA3000	3000

CLOU SPOT

PC lens beam angle 15°-50°.
Single cable entry. Driver built-in.

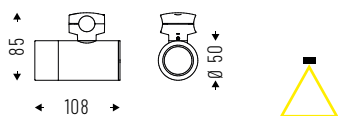


IP 66

Cod. 3000K	Led	lm	Ømm
59PC7K315	7W 15°	420	50
59PC7K350	7W 50°	420	50

CLOU SPOT MID

PC lens beam angle 15°-50°.

Double cable exit for in/out wiring. Driver built-in.

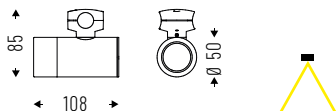

IP 66

Cod. 3000K	Led	lm	Ømm
59PC7K315M	7W 15°	420	50
59PC7K350M	7W 50°	420	50

CLOU ROUND STRIP

Silicone Led strip 7W/m.



IP 66

Cod. 3000K	Led	lm	Lmm
59SL7K360	7W/m	280lm/m	600
59SL7K390	7W/m	280lm/m	900
59SL7K3200	7W/m	280lm/m	2000
59SL7K3500	7W/m	280lm/m	5000

ACCESSORIES



Wall mounting element with end cap.

59AA14



Wall mounting element extension.

59AA14L



Wall mounting element 1 way.

59AA05



Cable connection.

59AA11



Cable with double connector for spot, length 500/1000/1500mm..

59ACA500
59ACA1000
59ACA1500



Driver box 24V IP67
30-60-100W 24V.

59BX3067
59BX6067
59BX10067



Driver ON/OFF IP 67
30-60-100W 24V.

59LC3024IS67
59LC6024IS67
59LC10024IS67

TECHNICAL NOTES



Clou can be used as garden light with different length.



Can combine spotlight with diffused light.