

# DIMPLES

ID 48

RECESSED

**DIMPLES** is a recessed, suspended and ceiling mounted installations fixture, characterized by a very **shallow profile** height of just 38mm, with integrated drivers and **unique aesthetics**. The individual **microcells contain optics** that can either be specified for offices applications requiring low glare, or for general lighting applications with broad lateral light distribution for core areas, including meeting rooms and break-out spaces. DIMPLES is offered in a **wide range of outputs and sizes**, for direct only or bidirectional light distribution, making it an extremely versatile lighting collection and a huge step beyond the conventional LED lit lighting panels.

## ☑ Features

- Direct emission
- UGR<16; <22
- IP 40

## 💡 Led

- 3000K/4000K
- >97 lm/W
- CRI >100
- Eye safety: RG0/RGI
- Mac Adams 3
- L80/B10 >50.000h

## ☑ Specifications

- Built-in driver
- Primary diffuser in satin PC UGR<16
- PG version with additional coplanar screen in opal PC UGR<22

## ☐ Body

- Satin ABS with anodized aluminum base

## 🎨 Colors

- White RAL 9003 - code B

## ☆ Certifications

- CE Conformity
- RETILAP Conformity
- Energy efficiency E
- 5 years warranty

## ⇒ Related products

- Dimples suspended/ceiling (p.128)

## ⊕ On request

- DALI - code D
- Bluetooth - code BT\*
- Emergency 1 hr - code EM
- Emergency 3 hrs - code EM3H\*

\* Where available



## DIMPLES

Satin ABS reflectors with primary PC frosted diffuser, UGR<16.




Cod. 4000K	Led	lm	Lmm
48DR44K4	44W	5132	595

Cod. 3000K	Led	lm	Lmm
48DR44K3	44W	4618	595

## DIMPLES PG

Satin ABS reflectors with primary PC frosted diffuser and additional frosted PC coplanar screen, UGR<22.

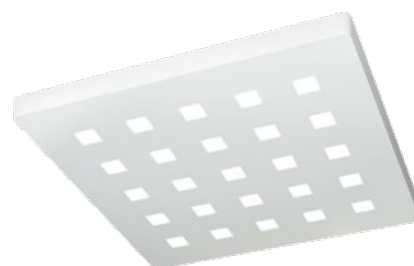

Cod. 4000K	Led	lm	Lmm
48PG44K4	44W	4874	595

Cod. 3000K	Led	lm	Lmm
48PG44K3	44W	4435	595