

ENDO DISPLAY

ID 55

The embody of light and architectural structure reaches the maximum of simplicity and versatility with **ENDO DISPLAY**. This **recessed linear solution** is equipped with a micro edge that makes **extremely practical and quick the installation** even in the most creative setting, leaving the full freedom to design. **ENDO DISPLAY** is available in **three versions** (**UGR<22** satin diffuser, **UGR<22 semi-recessed** satin diffuser, **UGR<16** microcell optic) and with Spot module for accent light.

☑ Features

- Direct emission
- Direct/indirect emission
- UGR< 22; <16
- IP 40

💡 Led

- 2700K/3000K/3500K
4000K/5000K
TW/RGBW/DTW
- >100lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- DK technology for UGR controlled with UGR<16
- PG diffuser for homogeneous emission with UGR<22
- DU diffuser for homogeneous emission Down & Up UGR<22

☐ Body

- Aluminum with epoxy powder coating

🎨 Colors

- Matte white RAL 9003 - code B
- Matte black RAL 9005 - code C8

☆ Certifications

- CE Conformity
- Energy efficiency F
- 5 years warranty

📄 On request

- DALI - code D*
- Bluetooth - code BT*
- Emergency 1 hr - code EM*
- Emergency 3 hrs - code EM3H*


* Where available






ENDO DISPLAY PG FREE

Aluminum profile with satin methacrylate diffuser for homogeneous emission, UGR<22.



IP 40

Cod.	mm
55PG500R	500
55PG1000R	1000
55PG2000R	2000
55PG3000R	3000


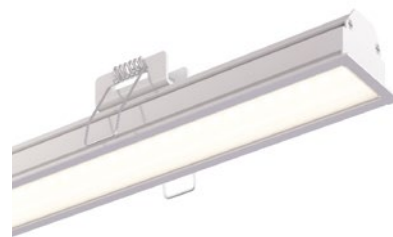


End caps and accessories not included.
Compatible FLEX STRIP LED from page 94.

Profile and diffuser can be cut at the desired length.
Example: 750mm - code: 55PG750/2012mm - code: 55PG2012.


ENDO DISPLAY DU FREE

Aluminum profile with protruding satin methacrylate diffuser for homogeneous emission, UGR<22.



IP 40

Cod.	mm
55DU500R	500
55DU1000R	1000
55DU2000R	2000
55DU3000R	3000


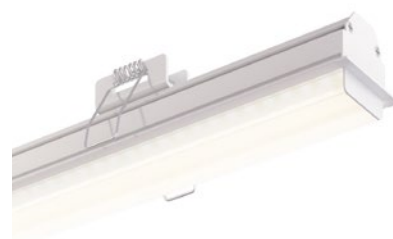


End caps and accessories not included.
Compatible FLEX STRIP LED from page 94.

Profile and diffuser can be cut at the desired length.
Example: 750mm - code: 55PG750/2012mm - code: 55PG2012.

ENDO DISPLAY PG

Aluminum profile with satin methacrylate diffuser for homogeneous emission, UGR<22.

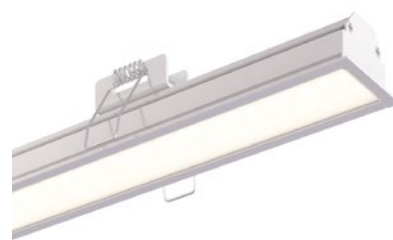

End caps and accessories not included.
Compatible DRIVERS on page 98.



Cod. 4000K	Led	lm	mm
55PG7K4R	7W	325	500
55PG15K4R	15W	650	1000
55PG30K4R	30W	1300	2000
55PG45K4R	45W	1950	3000

Cod. 3000K	Led	lm	mm
55PG7K3R	7W	304	500
55PG15K3R	15W	608	1000
55PG30K3R	30W	1216	2000
55PG45K3R	45W	1824	3000

Cod. 2700K	Led	lm	mm
55PG7K27R	7W	283	500
55PG15K27R	15W	565	1000
55PG30K27R	30W	1131	2000
55PG45K27R	45W	1696	3000

ENDO DISPLAY DU

Aluminum profile with protruding satin methacrylate diffuser for homogeneous emission, UGR<22.

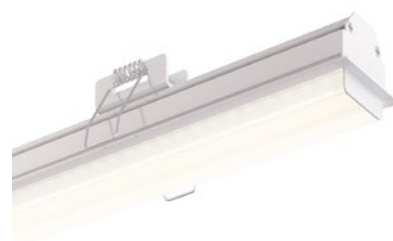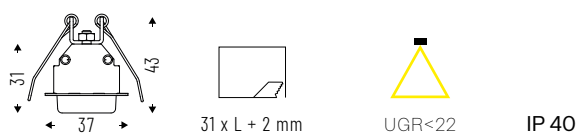

End caps and accessories not included.
Compatible DRIVERS on page 98.



Cod. 4000K	Led	lm	mm
55DU7K4R	7W	371	500
55DU15K4R	15W	745	1000
55DU30K4R	30W	1486	2000
55DU45K4R	45W	2232	3000

Cod. 3000K	Led	lm	mm
55DU7K3R	7W	348	500
55DU15K3R	15W	700	1000
55DU30K3R	30W	1395	2000
55DU45K3R	45W	2093	3000

Cod. 2700K	Led	lm	mm
55DU7K27R	7W	324	500
55DU15K27R	15W	651	1000
55DU30K27R	30W	1297	2000
55DU45K27R	45W	1946	3000

ENDO DISPLAY DK

Element with microcell optics for controlled UGR<16.



IP 40



End caps and accessories not included.
Compatible DRIVERS on page 98.

Cod. 4000K	Led	lm	mm
55DK7K4R	7W	900	255
55DK14K4R	14W	1800	515
55DK21K4R	21W	2700	772
55DK28K4R	28W	3600	1030
55DK35K4R	35W	4500	1290

Cod. 3000K	Led	lm	mm
55DK7K3R	7W	830	255
55DK14K3R	14W	1660	515
55DK21K3R	21W	2490	772
55DK28K3R	28W	3300	1030
55DK35K3R	35W	4150	1290

Cod. 2700K	Led	lm	mm
55DK7K27R	7W	747	255
55DK14K27R	14W	1494	515
55DK21K27R	21W	2385	772
55DK28K27R	28W	2970	1030
55DK35K27R	35W	3735	1290

ACCESSORIES



PG/DK end caps kit (consider +4mm on the cutting length).

55AA09R



DU end caps kit (consider +4mm on the cutting length).

55AA09DUR



Linear joint.

55AA11R



Blind screen module, white or black.

55MC1000
55MC2000
55MC3000