

## ACCESSORIES



3 poles ceiling powered supply box. Cable length 2000mm.

**00AA16**



5 poles ceiling powered supply box. Cable length 2000mm.

**00AA165P**



Spacers kit for ceiling mount (2 pieces).

**62AA14**



Linear joint.

**62AA11**



Single wire 1500mm/3000mm long adjustable suspension kit.

**62AA13**


**62AA1330**

## TECHNICAL NOTES

The double emission of **ETER is achieved through a single source**: this design allows to contain energy consumption and maintain luminous continuity. In the **PG version the side reflectors emit diffused light**, capable of illuminating the rooms in a homogeneous way.

In the **CPL version**, the innovative optics and darkened sides **concentrate the direct emission** making it **suitable for use with screen display**, while maintaining the **indirect component for ambient lighting**.

**ETER PG**

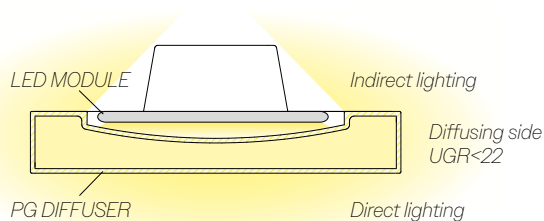

**ETER CPL**

