

ACCESSORIES



Cable with double connector length 500/2000/4000/8000mm.

38AACA500
38AACA2000
38AACA4000
38AACA8000



T-Connector with cable with one end of 1000mm and two of 500mm.

38AACA06



4x output distribution connectors with 1000mm cable.

38AACA4XDC



8x output distribution connectors with 1000mm cable.

38AACA8XDC



End cap connector.

38AA09CATP



Recessed box for installation on the ground or on concrete.

38AA17PK - Pico
38AA17MK - Micro




Driver box 24V IP67 with plug.


38BX1267 12W
38BX2067 20W
38BX3067 30W

TECHNICAL NOTES

Internal glue filled for complete water-proof and anti-condensation.

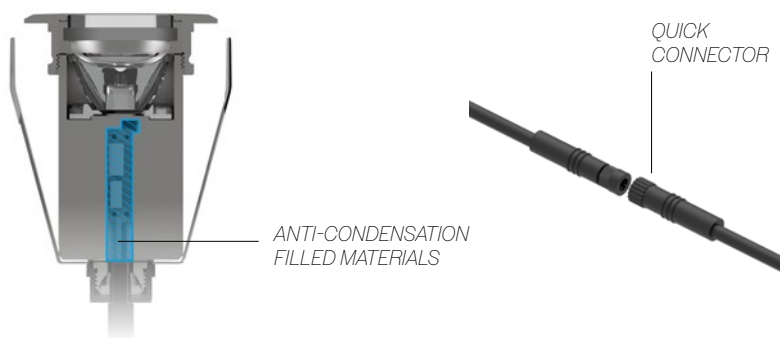

CONNECTION DIAGRAM

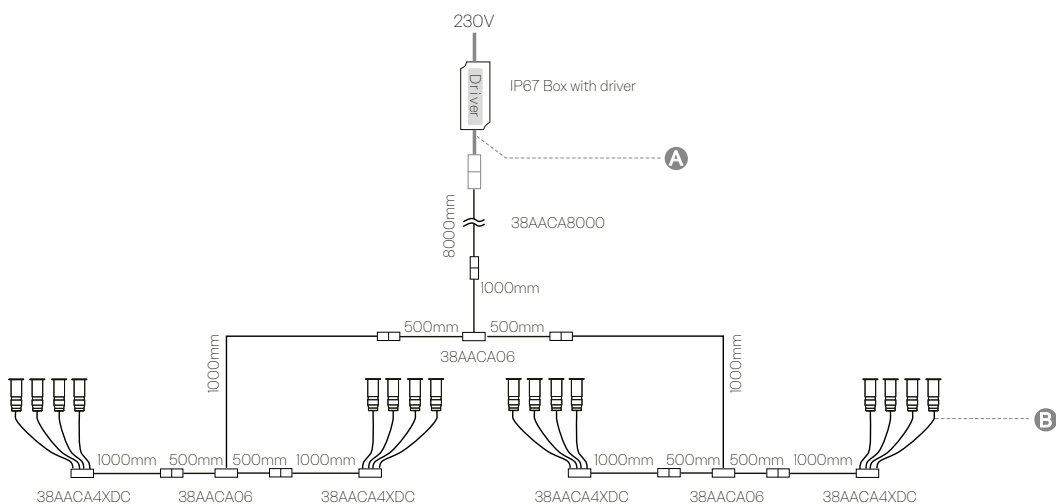

The maximum allowable distance between points A and B for expansion is 15 meters, without considering voltage drop interference in the distribution.

Power	Luminaire		
	Driver box 24V (ON/OFF)	HALL LED IP67 Piko (1W)	HALL LED IP67 Micro (3W)
12W	38Bx1267	10 pcs	3 pcs
20W	38Bx2067	12 pcs	5 pcs
30W	38Bx3067	26 pcs	8 pcs