

HALL LED CEILING PRO

ID 28

HALL LED CEILING PRO is the most **modern concept of the downlight** for ceiling installation developed for elegant dynamic and sophisticated spaces with a **clear architectural feature**. The slim body design and the **PC lenses (15°-24°-36°-50°) with UGR<19** doesn't compromise the lighting performances. The range of accessories elegantly enriches the customization possibilities.

DOWNLIGHT

☑ Features

- Direct emission
- UGR<19
- IP 44

💡 Led

- 3000K/4000K
- >135 lm/W
- CRI>90
- Eye safety: RG0/RGI
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Built-in driver
- CoB LED technology
- PC lens 15°-24°-36°-50°

📏 Body

- Die-cast aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

★ Certifications

- CE Conformity
- Energy efficiency E
- 5 years warranty


🔗 Related products

- Hall Led Ceiling Evo (p. 199)
- Hall Led Ceiling IP65 (p. 353)

📦 On request


- DALI - code D on 245mm body
- 2700K - code K27
- 5000K - code K5



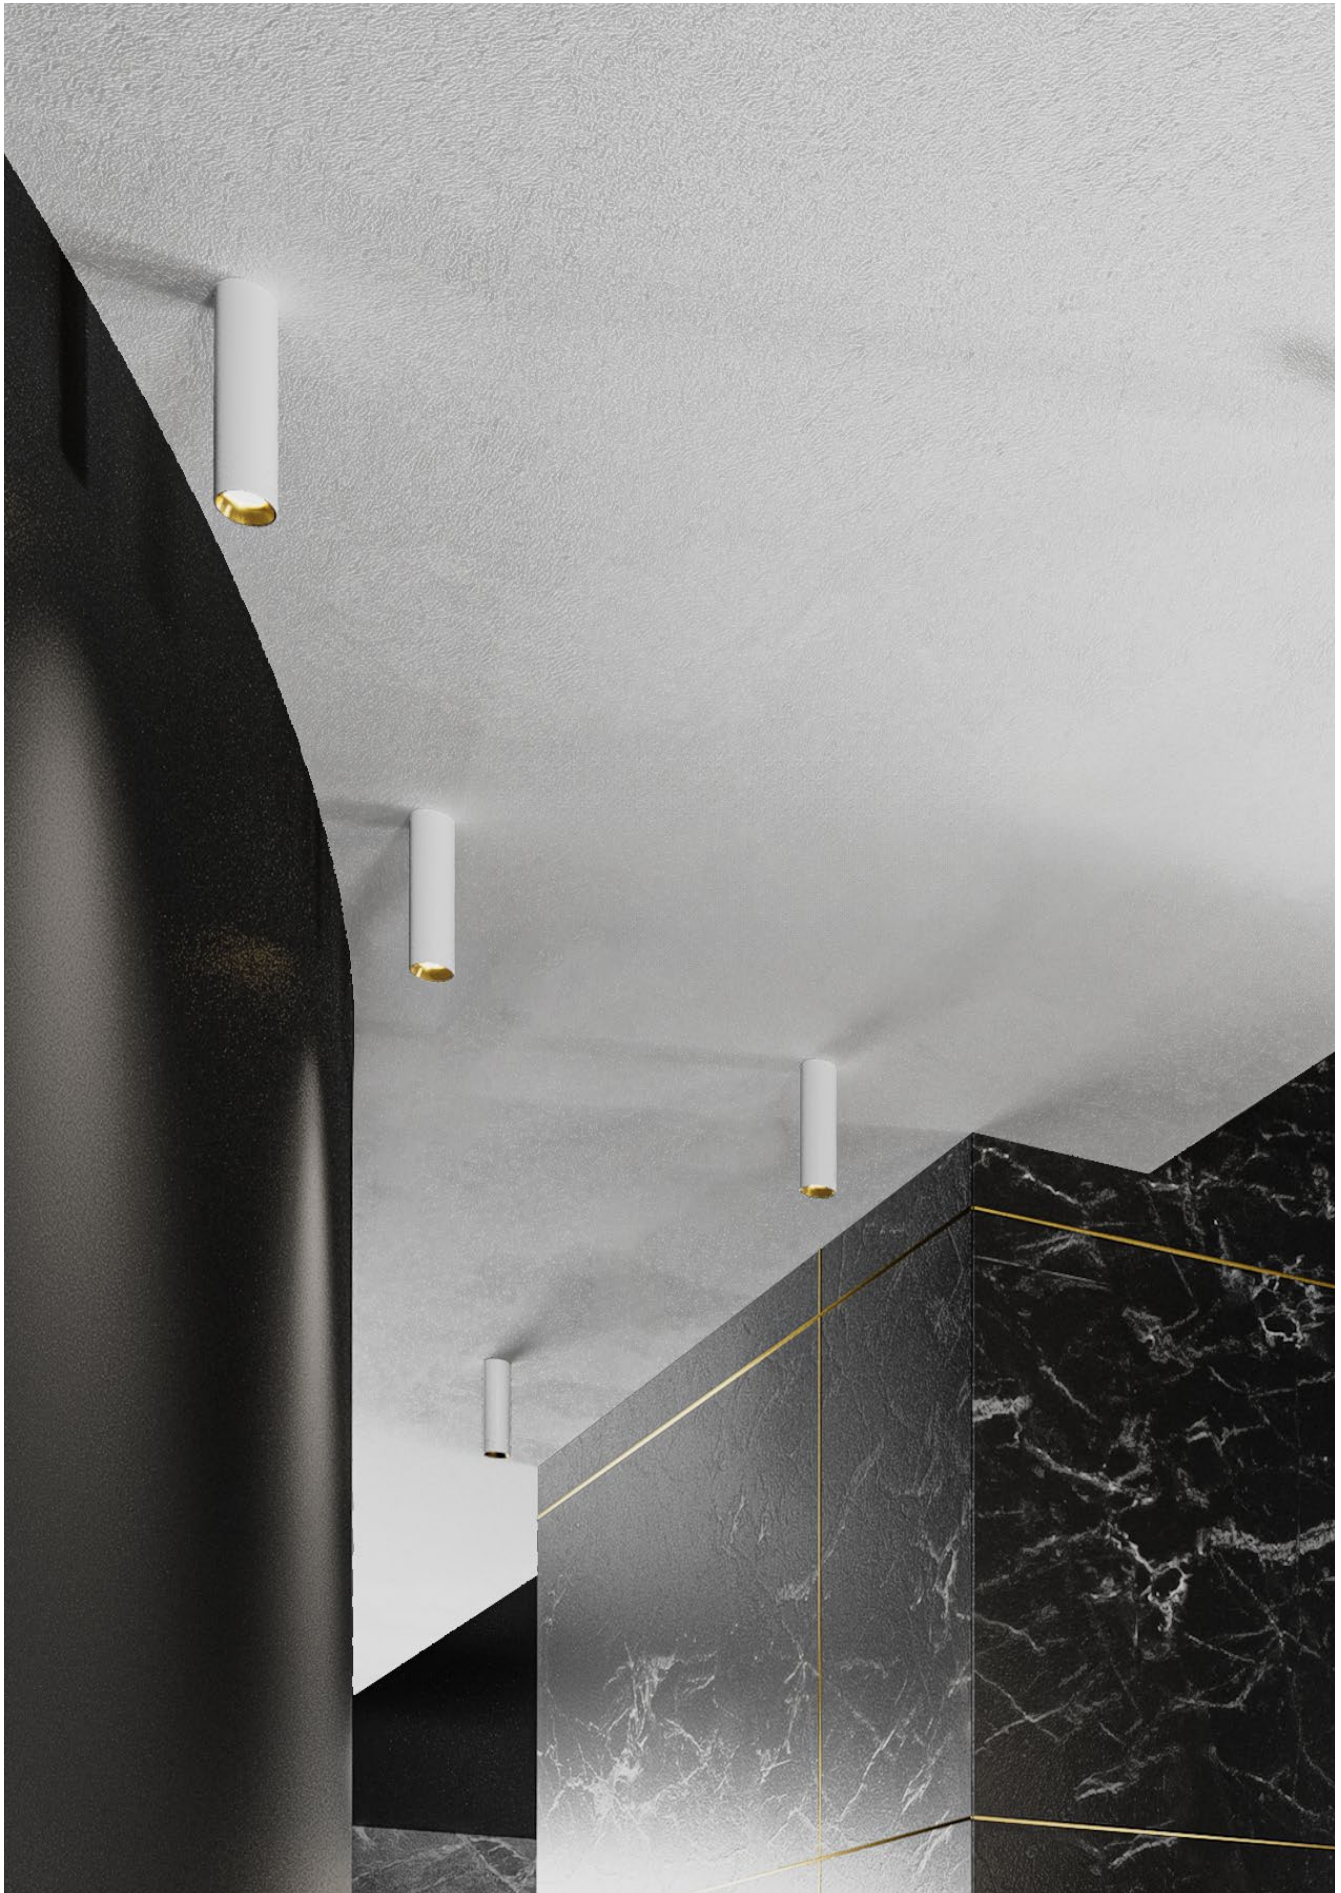

HALL LED CEILING PRO

PC lens 15°-24°-36°-50°. External ring included.

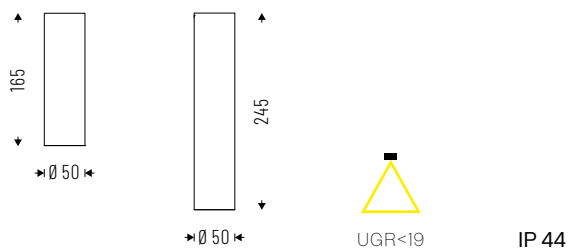

Cod. 4000K	Led	lm	Lmm
28PC15K415	15W 15°	1635	165
28PC15K424	15W 24°	1635	165
28PC15K436	15W 36°	1635	165
28PC15K450	15W 50°	1635	165
28PC15K415L	15W 15°	1635	245
28PC15K424L	15W 24°	1635	245
28PC15K436L	15W 36°	1635	245
28PC15K450L	15W 50°	1635	245

Cod. 3000K	Led	lm	Lmm
28PC15K315	15W 15°	1530	165
28PC15K324	15W 24°	1530	165
28PC15K336	15W 36°	1530	165
28PC15K350	15W 50°	1530	165
28PC15K315L	15W 15°	1530	245
28PC15K324L	15W 24°	1530	245
28PC15K336L	15W 36°	1530	245
28PC15K350L	15W 50°	1530	245

ACCESSORIES



External ring.

28RFA
28RFG
28RFW
28RFBK



Ceiling kit for suspended installation with 3-5 pole power rose and 3000mm cable.

28AA165PS



Honey comb.

28AAND

TECHNICAL NOTES

HALL LED CEILING PRO offers the possibility of changing the external ring choosing from four different colors.

