

HALL LED IP67

ID 38

HALL LED IP67 is the **new solution in the HALL LED family** that combines elegant visual impact with outstanding **waterproof and anti-condensation performances**. HALL LED IP67 is suitable for installation on the ground or on concrete. The two available bodies, Pico and Micro, can be combined with transparent glass with PC lens (16°-24°-36° beam angle) **for scenographic accent lighting or with matt glass** to create a soft, diffused light.

☑ Features

- IP 67
- IK10
- -20° C/+40° C
- 20 KN

💡 Led

- 3000K
- >115 lm/W
- CRI >80
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- CoB LED technology
- PC lens 16°-24°-36°-50° or broad emission

📏 Body

- Aluminum with epoxy powder coating

🎨 Colors

- Stainless steel

★ Certifications

- CE Conformity
- Energy efficiency F
- 5 years warranty

📦 On request


- DALI - code D*
- 4000K - code K4*

** Where available*



HALL LED IP67 PICO ACCENT LIGHT


Transparent glass with PC lens beam angle 16°-24°-36°.
1000mm cable with connector. Without driver.

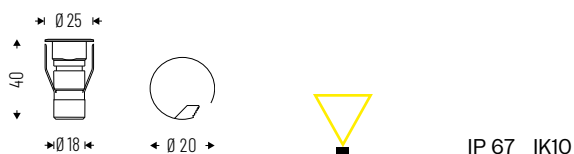

Cod.	Led	lm	Ømm
38ALIK316	1W 16°	85	25
38ALIK324	1W 24°	85	25
38ALIK336	1W 36°	85	25

HALL LED IP67 MICRO ACCENT LIGHT


Transparent glass with PC lens beam angle 16°-24°-36°-50°.
1000mm cable with connector. Without driver.

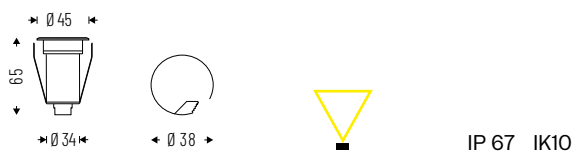

Cod.	Led	lm	Ømm
38AL3K316	3W 16°	280	45
38AL3K324	3W 24°	280	45
38AL3K336	3W 36°	280	45
38AL3K350	3W 50°	280	45

HALL LED IP67 PICO DIFFUSED LIGHT


Matt glass for diffused light 1000mm
cable with connector. Without driver.

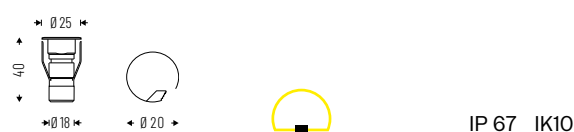

Cod.	Led	lm	Ømm
38VSIK3	1W	80	25

HALL LED IP67 MICRO DIFFUSED LIGHT

Matt glass for diffused light 1000mm cable with connector. Without driver.



IP 67 IK10



Cod.	Led	lm	Ømm
38VS3K3	3W	275	45

ACCESSORIES



Cable with double connector length 500/2000/4000/8000mm.

38AACA500
38AACA2000
38AACA4000
38AACA8000



T-Connector with cable with one end of 1000mm and two of 500mm.

38AACA06



4x output distribution connectors with 1000mm cable.

38AACA4XDC



8x output distribution connectors with 1000mm cable.

38AACA8XDC



End cap connector.

38AA09CATP



Recessed box for installation on the ground or on concrete.

38AA17PK - Pico
38AA17MK - Micro




Driver box 24V IP67 with plug.


38BX1267 12W
38BX2067 20W
38BX3067 30W

TECHNICAL NOTES

Internal glue filled for complete water-proof and anti-condensation.




ANTI-CONDENSATION FILLED MATERIALS



QUICK CONNECTOR

CONNECTION DIAGRAM

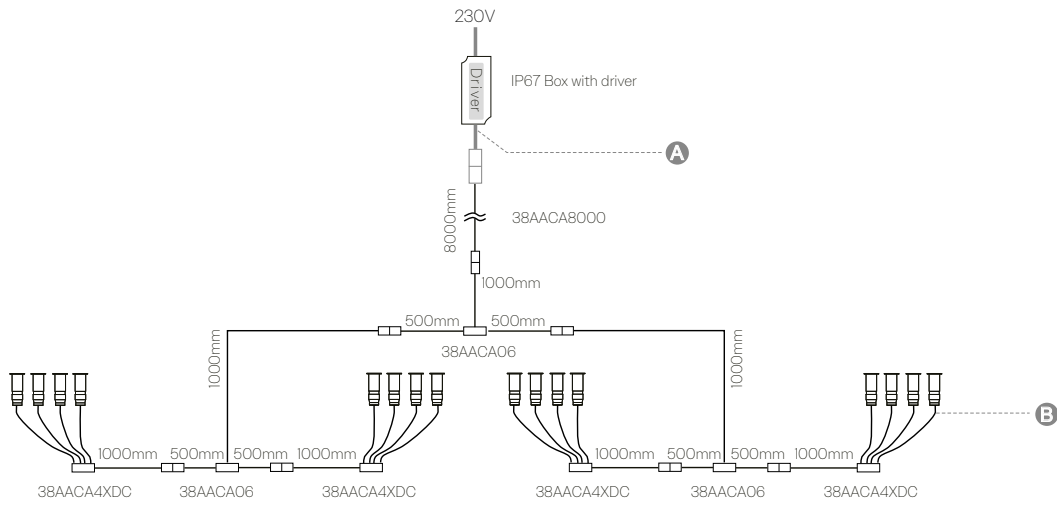

The maximum allowable distance between points A and B for expansion is 15 meters, without considering voltage drop interference in the distribution.

Power	Luminaire		
	Driver box 24V (ON/OFF)	HALL LED IP67 Piko (1W)	HALL LED IP67 Micro (3W)
12W	38Bxi267	10 pcs	3 pcs
20W	38Bx2067	12 pcs	5 pcs
30W	38Bx3067	26 pcs	8 pcs