

ISIB LED IP54

ID 34

ISIB LED IP54 fixtures with **back light LED technology** are the perfect mix between **competitiveness, performance and flexibility**. Perfect homogeneous emission thanks to the **frosted or microprismatic diffuser**. The **IP54 rating** make it also suitable for environments where a high degree of protection is required. Ideal for false ceilings with exposed structure, ISIB LED IP54 can be installed **also on plasterboard** thanks to the dedicated accessory.

☑ Features

- Direct emission
- UGR<22; <19
- IP 54 visible side

🔌 Led

- 3000K/4000K
- >112 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Built-in driver
- Quick connector for easy wiring
- High homogeneity satin acrylic diffuser glued to the body, UGR<22
- Additional microprismatic plate applied on the structure, UGR<19

📦 Body

- Steel sheet with epoxy powder coating

🎨 Colors

- White RAL 9003

★ Certifications

- CE Conformity
- Energy efficiency D
- 5 years warranty

📄 On request


- DALI - code D
- Bluetooth - code BT*
- Emergency 1 hr - code EM
- Emergency 3 hrs - code EM3H*
- False ceiling version 625x625mm*
- Ceiling mount installation kit*
- 5000K - code K5*

* Where available



ISIB LED IP54 PG

Frosted high homogeneity acrylic diffuser glued to the body, UGR<22.

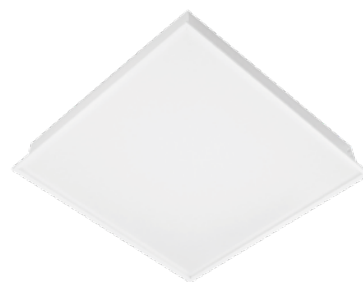

IP 54

Cod. 4000K	Led	lm	Lmm
34PG34K454	34W	3952	596x596
34PG55K454	55W	6175	596x596
34PG34K4M354	34W	3952	296x1196

Cod. 3000K	Led	lm	Lmm
34PG34K354	34W	3786	596x596
34PG55K354	55W	5558	596x596
34PG34K3M354	34W	3786	296x1196

ACCESSORIES



Microprismatic plate (UGR<19) for mounting on ceiling module 600 with visible structure.

LMISIMP3454 594x594mm
LMISIMP34M354 294x1194mm



Plasterboard installation frame.

FCG3454 600x600mm
FCG34M354 300x1200mm