

ISI LED IP65

ID 31

ISI LED IP65 is designed for **sterile environments**: a universal LED technology fixture for **false ceiling with visible and hidden structure**.

☑ Features

- Direct emission
- UGR<19; <22
- IP 65

💡 Led

- 3000K/4000K
- >104 lm/W
- CRI>90
- Eye safety: RGO/RGI
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Built-in driver
- Fixed power current driver
- Nominal life span 50.000h
- (T° max 50° C/failure rate ≤0.2% per 1,000h)
- Quick connector supplied as standard
- DPL with internal microprismatic plate, UGR<19
- PG with PMMA diffuser for homogeneous emission, UGR<22

📏 Body

- Extruded aluminum frame
- Steel sheet with epoxy powder coating

🎨 Colors

- White RAL 9003

★ Certifications

- CE Conformity
- Energy efficiency D
- 5 years warranty

📦 On request

- DALI - code D
- Emergency 1 hr - code EM
- Emergency 3 hrs - code EM3H*
- 5000K - code K5*
- Ceiling version*
- False ceiling version 625x625mm*

* Where available



ISI LED IP65 VDPL

VDPL technology with UGR<19 composed by a microprismatic internal sheet and a transparent protective glass.




Cod. 4000K	Led	Im	Lmm
31VDPL38K465	38W	3341	597x597
31VDPL64K465	64W	6130	597x597
31VDPL38K465M3	38W	3341	297x1197
31VDPL64K465M3	64W	6130	297x1197

Cod. 3000K	Led	Im	Lmm
31VDPL38K365	38W	3132	597x597
31VDPL64K365	64W	5833	597x597
31VDPL38K365M3	38W	3132	297x1197
31VDPL64K365M3	64W	5833	297x1197

ISI LED IP65 VG

Frosted tempered anti-glare glass, UGR<22.

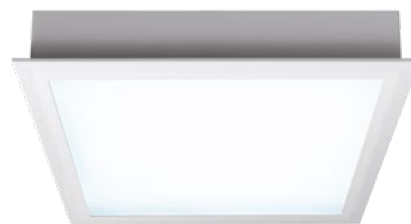

Cod. 4000K	Led	Im	Lmm
31VG38K465	38W	3393	597x597
31VG64K465	64W	6670	597x597
31VG38K465M3	38W	3393	297x1197
31VG64K465M3	64W	6670	297x1197

Cod. 3000K	Led	Im	Lmm
31VG38K365	38W	3177	597x597
31VG64K365	64W	6071	597x597
31VG38K365M3	38W	3177	297x1197
31VG64K365M3	64W	6071	297x1197

ACCESSORIES



Kit of fixing brackets for installation on plasterboard, with hidden structure and on slats.

KSFIP65