

NEXT is the **contemporary design fixture** that perfectly fits in those architectural contexts where sober and minimal shapes are required. It is available as indoor versions for ceiling, recessed or recessed frameless installation, **with controlled UGR optics (<16)**.

☑ Features

- Direct emission
- Direct/indirect emission
- UGR<16
- IP 40

💡 Led

- 3000K/4000K
- >80 lm/W
- CRI>90
- Eye safety: RG0/RGI
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Built-in driver
- SMD LED technology
- High Contrast UGR<16 diffuser
- Impact resistant satin acrylic diffuser with perimeter screen printing
- Aluminum frame with sealing gasket
- Homogeneous emission with UGR<22

☐ Body

- Die-cast aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

☆ Certifications

- CE Conformity
- RETILAP Conformity
- Energy efficiency E
- 5 years warranty

↔ Related products

- Next DK LV (p. 248)

⊕ On request


- DALI - code D
- Bluetooth - code BT*
- Emergency 1 hr - code EM
- Emergency 3 hrs - code EM3H*
- 2700K - code K27*

* Where available



NEXT DK CEILING

High Contrast diffuser UGR<16.



IP 40




Cod. 4000K	Led	Im	Lmm
50DK16K4C	16W	1262	82x82

Cod. 3000K	Led	Im	Lmm
50DK16K3C	16W	1174	82x82

NEXT DK RECESSED

High Contrast dffuser UGR<16.

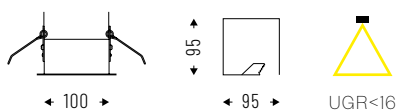

IP 40




Cod. 4000K	Led	Im	Lmm
50DK16K4R	16W	1262	100x100

Cod. 3000K	Led	Im	Lmm
50DK16K3R	16W	1174	100x100

NEXT DK RECESSED FL

High Contrast diffuser UGR<16.

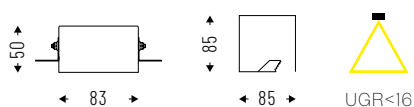

IP 40



Cod. 4000K	Led	Im	Lmm
50DK16K4F	16W	1262	83x83

Cod. 3000K	Led	Im	Lmm
50DK16K3F	16W	1174	83x83

NEXT DK LV

ID 50

NEXT DK LV is the new luminaire with a **contemporary design** that perfectly fits into those contexts where architectural design requires sober and minimal shapes. **Compatible with both surface-mounted and recessed low voltage tracks.**

☑ Features

- Direct emission
- UGR<16
- IP 40

💡 Led

- 3000K/4000K
- >107 lm/W
- CRI>90
- Eye safety: RGO/RGi
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Operation at 48V VDC
- High Contrast Diffuser UGR<16

☐ Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

☆ Certifications

- CE Conformity
- RETILAP Conformity
- Energy efficiency E
- 5 years warranty


⇄ Related products

- Next (p. 197)

📦 On request


- DALI - code D*
- Bluetooth - code BT*
- 2700K - code K27

** Where available
For SWITCHDIM command
use DIMTDS (p. 381)*

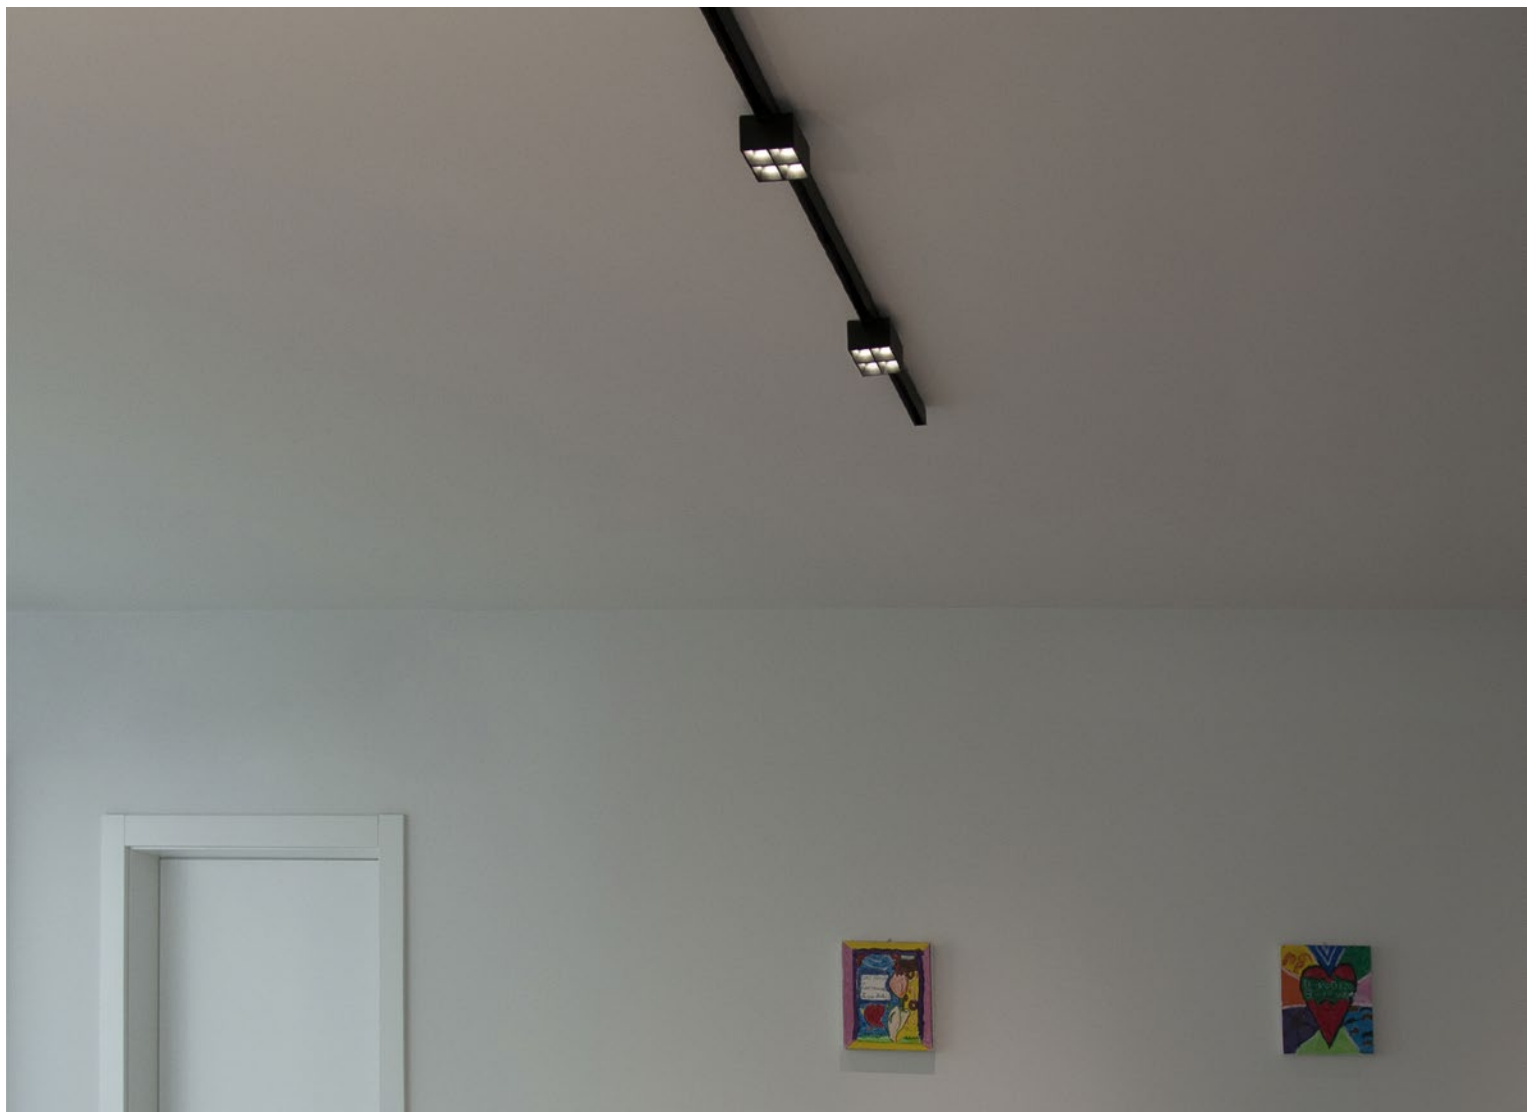

NEXT DK LV

High Contrast Diffuser, UGR<16.
Installable on 48V low voltage tracks.



IP 40

Cod. 4000K	Led	lm	Lmm
50DK11K4LV	11W	875	82

Cod. 3000K	Led	lm	Lmm
50DK11K3LV	11W	830	82