

ACCESSORIES



CLD screen,
(collimated optics UGR<16)
1000mm/2000mm/
3000mm.

83CLD1000
83CLD2000
83CLD3000



PG screen,
(UGR<22) 1000mm/
2000mm/3000mm.

83PG1000
83PG2000
83PG3000



Semi-opaque
PMMA indirect film.
1200mm length.

83IN1000



CLD screen,
(collimated optics UGR<16)
10m roll for cutting to length
on continuous lines without
interruptions.

83CLD10000



PG screen,
(UGR<22) 10m roll for cutting
to length on continuous lines
without interruptions.

83SC10000



Adjustable suspension
kit. Cable length
1500mm/3000mm.

83AA13
83AA1330



Ceiling installation
kit.

83AA14



3-5 poles ceiling
power supply box.
Cable length 2000mm.

00AA16
00AA165P



End caps kit.
(3mm thickness included
in the product length).

83AA09



Linear joint.

83AA11




Brackets kit for
recessed installation.

83AA17

TECHNICAL NOTES


PROFREEL lets full freedom to customize both the length and the luminous shapes you want to create. Horizontal and vertical angles are obtained with extreme simplicity by sectioning the profile and the diffuser directly on site.

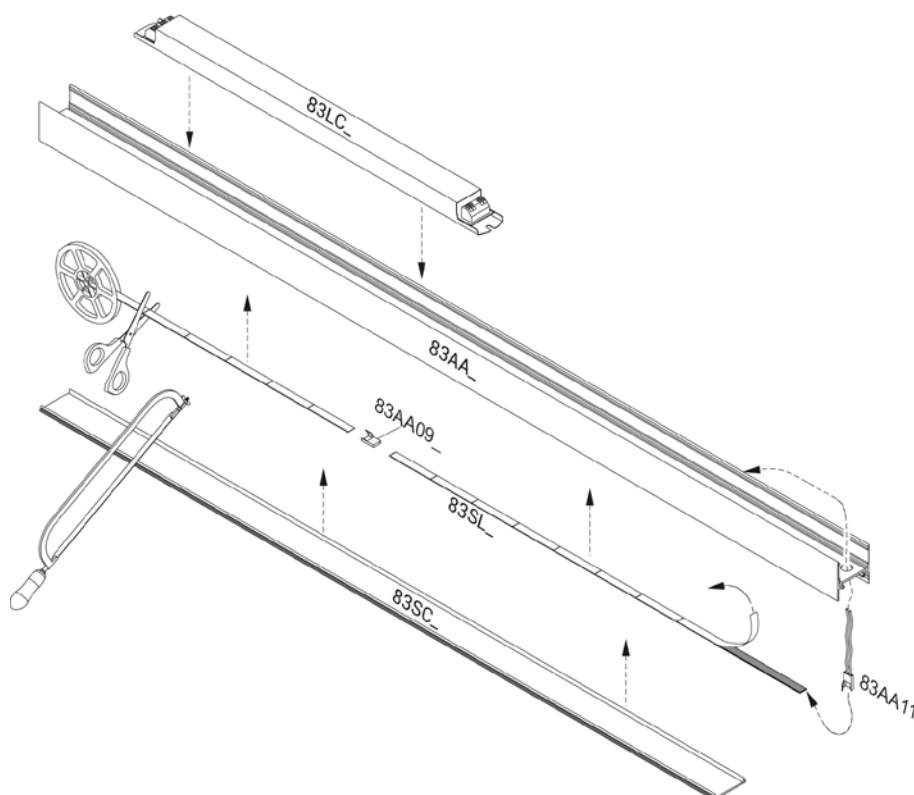


FEW EASY STEP

1. Define and select the length of the system
2. Choose the power/flux and the type of LED Strip
3. Match the correct driver and linking connectors
4. Choose the diffuser and accessories for installation


INSTALLATION EXAMPLES



SUSPENSION



CEILING



RECESSED