

TERES EXTE

ID 14

Differentiation is a factor of success: versatility is an important aspect in the world of lighting. This is how **TERES EXTE was born from the TERES family**, allowing the luminaire to be applied as a **stand alone fixture**, for both surface or recessed installation. With the driver integrated inside the body, it fits to any situation thanks to the minimal design and purity of shapes. The **TERES EXTE COVE** version can also be installed as a free-standing luminaire on cornices or perimeter coves.

☑ Features

- Direct emission
- UGR<19
- IP 40

💡 Led

- 3000K/4000K
- >110 lm/W; >113 lm/W
- CRI >110
- Eye safety: RG0/RGI
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Built-in driver
- CoB LED technology
- Internal aluminum reflectors: beam angles: 10°-20°-40°-50°- 70°

📦 Body

- Die-cast aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

★ Certifications

- CE Conformity
- RETILAP Conformity
- Energy efficiency C
- 5 years warranty
- ETL certification

⇄ Related products

- Teres (p. 224)
- Teres Micro Zoom (p. 178)
- Teres IP66 (p. 356)

📦 On request

- DALI - code D*
- Bluetooth - code BT*
- 2700K - code: K27*
- 5000K - code: K5*


* Where available



TERES EXTE CEILING SMALL

Internal aluminum reflectors.

Beam angles: 10°-20°-40°-50°.



IP 40


Cod. 4000K	Led	lm	Ømm
14VT9K410SP	9W 10°	1467	80
14VT9K420SP	9W 20°	1467	80
14VT9K440SP	9W 40°	1467	80
14VT9K450SP	9W 50°	1467	80
14VT12K410SP	12W 10°	1991	80
14VT12K420SP	12W 20°	1991	80
14VT12K440SP	12W 40°	1991	80
14VT12K450SP	12W 50°	1991	80

Cod. 3000K	Led	lm	Ømm
14VT9K310SP	9W 10°	1335	80
14VT9K320SP	9W 20°	1335	80
14VT9K340SP	9W 40°	1335	80
14VT9K350SP	9W 50°	1335	80
14VT12K310SP	12W 10°	1812	80
14VT12K320SP	12W 20°	1812	80
14VT12K340SP	12W 40°	1812	80
14VT12K350SP	12W 50°	1812	80

TERES EXTE CEILING MEDIUM

Internal aluminum reflectors.

Beam angles: 10°-20°-40°-70°.



IP 40


Cod. 4000K	Led	lm	Ømm
14VT13K410MP	13W 10°	2086	110
14VT13K420MP	13W 20°	2086	110
14VT13K440MP	13W 40°	2086	110
14VT13K470MP	13W 70°	2086	110
14VT19K410MP	19W 10°	2874	110
14VT19K420MP	19W 20°	2874	110
14VT19K440MP	19W 40°	2874	110
14VT19K470MP	19W 70°	2874	110
14VT26K410MP	26W 10°	3683	110
14VT26K420MP	26W 20°	3683	110
14VT26K440MP	26W 40°	3683	110
14VT26K470MP	26W 70°	3683	110

Cod. 3000K	Led	lm	Ømm
14VT13K310MP	13W 10°	1898	110
14VT13K320MP	13W 20°	1898	110
14VT13K340MP	13W 40°	1898	110
14VT13K370MP	13W 70°	1898	110
14VT19K310MP	19W 10°	2615	110
14VT19K320MP	19W 20°	2615	110
14VT19K340MP	19W 40°	2615	110
14VT19K370MP	19W 70°	2615	110
14VT26K310MP	26W 10°	3566	110
14VT26K320MP	26W 20°	3566	110
14VT26K340MP	26W 40°	3566	110
14VT26K370MP	26W 70°	3566	110

TERES EXTE RECESSED SMALL

Internal aluminum reflectors.

Beam angles: 10°-20°-40°-50°.

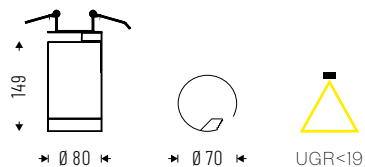

IP 40


Cod. 4000K	Led	lm	Ømm
14VT9K410SR	9W 10°	1467	80
14VT9K420SR	9W 20°	1467	80
14VT9K440SR	9W 40°	1467	80
14VT9K450SR	9W 50°	1467	80
14VT12K410SR	12W 10°	1991	80
14VT12K420SR	12W 20°	1991	80
14VT12K440SR	12W 40°	1991	80
14VT12K450SR	12W 50°	1991	80

Cod. 3000K	Led	lm	Ømm
14VT9K310SR	9W 10°	1335	80
14VT9K320SR	9W 20°	1335	80
14VT9K340SR	9W 40°	1335	80
14VT9K350SR	9W 50°	1335	80
14VT12K310SR	12W 10°	1812	80
14VT12K320SR	12W 20°	1812	80
14VT12K340SR	12W 40°	1812	80
14VT12K350SR	12W 50°	1812	80

TERES EXTE RECESSED MEDIUM

Internal aluminum reflectors.

Beam angles: 10°-20°-40°-70°.

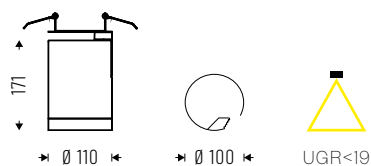


IP 40

Cod. 4000K	Led	lm	Ømm
14VT13K410MR	13W 10°	2086	110
14VT13K420MR	13W 20°	2086	110
14VT13K440MR	13W 40°	2086	110
14VT13K470MR	13W 70°	2086	110
14VT19K410MR	19W 10°	2874	110
14VT19K420MR	19W 20°	2874	110
14VT19K440MR	19W 40°	2874	110
14VT19K470MR	19W 70°	2874	110
14VT26K410MR	26W 10°	3683	110
14VT26K420MR	26W 20°	3683	110
14VT26K440MR	26W 40°	3683	110
14VT26K470MR	26W 70°	3683	110

Cod. 3000K	Led	lm	Ømm
14VT13K310MR	13W 10°	1898	110
14VT13K320MR	13W 20°	1898	110
14VT13K340MR	13W 40°	1898	110
14VT13K370MR	13W 70°	1898	110
14VT19K310MR	19W 10°	2615	110
14VT19K320MR	19W 20°	2615	110
14VT19K340MR	19W 40°	2615	110
14VT19K370MR	19W 70°	2615	110
14VT26K310MR	26W 10°	3566	110
14VT26K320MR	26W 20°	3566	110
14VT26K340MR	26W 40°	3566	110
14VT26K370MR	26W 70°	3566	110

TERES EXTE COVE HF

Internal aluminum reflectors.
Beam angles: 10°-20°-40°-70°.



IP 40

Cod. 4000K	Led	lm	Ømm
14VT29K410HFC	29W 10°	4091	110
14VT29K420HFC	29W 20°	4091	110
14VT29K440HFC	29W 40°	4091	110
14VT29K470HFC	29W 70°	4091	110
14VT32K410HFC	32W 10°	4873	110
14VT32K420HFC	32W 20°	4873	110
14VT32K440HFC	32W 40°	4873	110
14VT32K470HFC	32W 70°	4873	110
14VT38K410HFC	38W 10°	5243	110
14VT38K420HFC	38W 20°	5243	110
14VT38K440HFC	38W 40°	5243	110
14VT38K470HFC	38W 70°	5243	110

Cod. 3000K	Led	lm	Ømm
14VT29K310HFC	29W 10°	3719	110
14VT29K320HFC	29W 20°	3719	110
14VT29K340HFC	29W 40°	3719	110
14VT29K370HFC	29W 70°	3719	110
14VT32K310HFC	32W 10°	4440	110
14VT32K320HFC	32W 20°	4440	110
14VT32K340HFC	32W 40°	4440	110
14VT32K370HFC	32W 70°	4440	110
14VT38K310HFC	38W 10°	4774	110
14VT38K320HFC	38W 20°	4774	110
14VT38K340HFC	38W 40°	4774	110
14VT38K370HFC	38W 70°	4774	110

ACCESSORIES

TERES EXTE OPTICS (ONLY FOR CEILING AND RECESSED VERSIONS)



TERES EXTE SMALL
Clear glass.

14AAVTS



TERES EXTE SMALL
Frost glass.

14AAMGS



TERES EXTE SMALL
Micro-engraved glass.

14AASLS



TERES EXTE SMALL
Honeycomb optics.

14AANDS



TERES EXTE MEDIUM
Clear glass.

14AAVTM



TERES EXTE MEDIUM
Frost glass.

14AAMGM



TERES EXTE MEDIUM
Micro-engraved glass.

14AASLM



TERES EXTE MEDIUM
Honeycomb optics.

14AANDM

ANTI-GLARE RINGS

Anti-glare rings that allow to focus the light beam hiding the light source. They perfectly fit in art galleries, museums and retail areas to value the subject with accent light without annoying glare issues - UGR<16.



14AA80AGW

- Teres Small

Internal/external color:
White RAL 9003.

14AA80AGWBK


- Teres Small

Internal color: Black RAL 9005.
External color: White RAL 9003.

14AA80AGBK

- Teres Small

Internal/external color:
Black RAL 9005.



14AA110AGW

- Teres Medium/HF

Internal/external color:
White RAL 9003.

14AA110AGWBK

- Teres Medium/HF

Internal color: Black RAL 9005.
External color: White RAL 9003.

14AA110AGBK

- Teres Medium/HF

Internal/external color:
Black RAL 9005.