

# TERES LV

ID 14

**TERES** also takes up space in the world of low voltage. The result is a spot with extremely contained dimensions: with a **diameter of 31 and 50mm**, powered at 48V, it is ideal for accent **lighting in prestigious environments**.

## ☑ Features

- Direct emission
- UGR<19
- IP 40

## 💡 Led

- 3000K/4000K
- >80 lm/W
- CRI>90
- Eye safety: RGO/RGI
- Mac Adams 3
- L80/B10 >50.000h

## ⌚ Specifications

- Built-in driver
- 48V DC operation
- Lens with adjustable beam, from 10° to 60°
- Honeycomb optic

## ☐ Body

- Die-cast aluminum with epoxy powder coating

## 🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

## ☆ Certifications

- CE Conformity
- RETILAP Conformity
- Energy efficiency E
- 5 years warranty


## ⇄ Related products

- Teres (p. 224)
- Teres Exte (p. 231)

## 📦 On request


- DALI - code D
- Bluetooth - code BT\*
- 2700K - code K27\*

*\* Where available  
For SWITCHDIM  
use DIMTDS (p. 38!)*

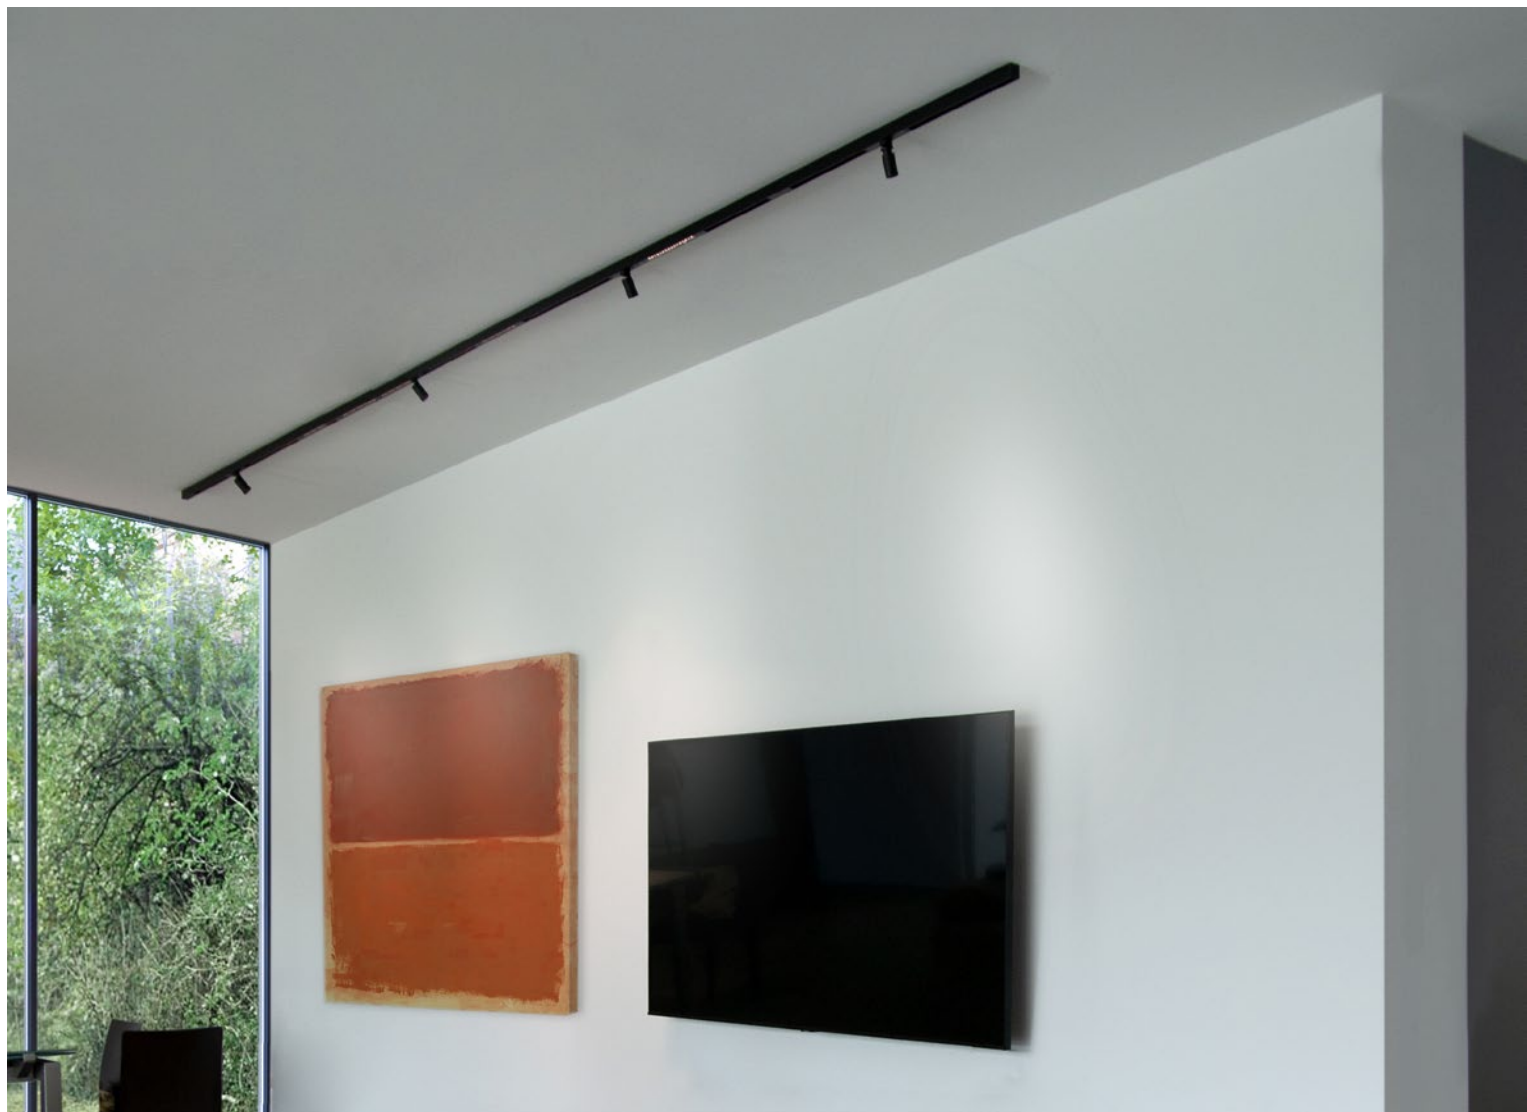

## TERES LV MICRO ZOOM 1x

Lens with adjustable beam from 10° to 40°.

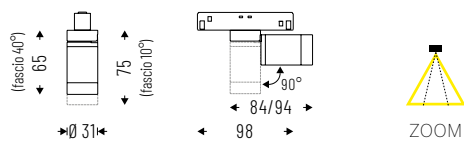


IP 40

Cod. 4000K	Led	lm	Ømm
14ZM3K4NLV	1x3W	262	31
14ZM7K4NLV	1x7W	560	31

Cod. 3000K	Led	lm	Ømm
14ZM3K3NLV	1x3W	238	31
14ZM7K3NLV	1x7W	510	31

## TERES LV MICRO ZOOM 2x

Lens with adjustable beam from 10° to 40°.

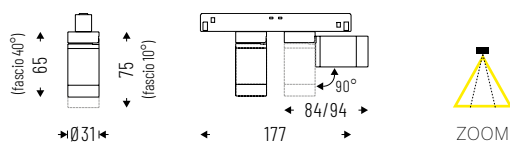


IP 40

Cod. 4000K	Led	lm	Ømm
14ZM23K4NLV	2x3W	524	31
14ZM27K4NLV	2x7W	1120	31

Cod. 3000K	Led	lm	Ømm
14ZM23K3NLV	2x3W	476	31
14ZM27K3NLV	2x7W	1020	31

## TERES LV MINI ZOOM

Lens with adjustable beam from 10° to 60°.



IP 40


Cod. 4000K	Led	lm	Ømm
14ZM8K4MNLV	8W	608	50
14ZM12K4MNLV	12W	915	50

Cod. 3000K	Led	lm	Ømm
14ZM8K3MNLV	8W	568	50
14ZM12K3MNLV	12W	855	50

LOW VOLTAGE

# TERES PRO LV PC

PC lens 15°-24°-36°-50°.



IP 40




Cod.	4000K	Led	lm	Ømm
14PC15K415LV	15W 15°	1695	50	
14PC15K424LV	15W 24°	1695	50	
14PC15K436LV	15W 36°	1695	50	
14PC15K450LV	15W 50°	1695	50	
14PC21K415LV	21W 15°	2373	50	
14PC21K424LV	21W 24°	2373	50	
14PC21K436LV	21W 36°	2373	50	
14PC21K450LV	21W 50°	2373	50	

Cod.	3000K	Led	lm	Ømm
14PC15K315LV	15W 15°	1530	50	
14PC15K324LV	15W 24°	1530	50	
14PC15K336LV	15W 36°	1530	50	
14PC15K350LV	15W 50°	1530	50	
14PC21K315LV	21W 15°	2135	50	
14PC21K324LV	21W 24°	2135	50	
14PC21K336LV	21W 36°	2135	50	
14PC21K350LV	21W 50°	2135	50	

# TERES PRO LV ZOOM

PC adjustable lens 10°-45°.



IP 40



Cod.	4000K	Led	lm	Ømm
14ZM15K4LV	15W 10°-45°	1653	50	
14ZM21K4LV	21W 10°-45°	2295	50	

Cod.	3000K	Led	lm	Ømm
14ZM15K3LV	15W 10°-45°	1487	50	
14ZM21K3LV	21W 10°-45°	2065	50	

## ACCESSORIES



External ring for Teres Pro-Pc.

- 14RFA** - Chromed
- 14RFG** - Gold
- 14RFW** - White
- 14RFBK** - Black

### TERES LV MINI ZOOM OPTICS



Frost glass.

**14AAMGZMN**



Micro-engraved glass.

**14AASLZMN**