

# TERES MICRO ZOOM RECESSED

ID 14

**TERES MICRO ZOOM RECESSED** is the new directional recessed spotlight with **extremely small dimensions** and **high performance**: in only 65mm per 31mm of diameter is concentrated a spot with **adjustable beam lens (from 10° to 40°)** perfect for an accent light in those areas where the presence of the fixture must be discreet. Available in recessed versions with visible frame or frameless, single or with multiple spots.

## ☑ Features

- Direct emission
- UGR<19
- IP 40

## 💡 Led

- 3000K/4000K
- >80 lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

## 🕒 Specifications

- Lens with adjustable beam, from 10° to 40°
- Honeycomb optic

## ☐ Body

- Aluminum with epoxy powder coating

## 🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

## ☆ Certifications

- CE Conformity
- RETILAP Conformity
- Energy efficiency E
- 5 years warranty

## 📦 On request


- DALI - code D
- 2700K - code K27\*

\* Where available



## TERES MICRO ZOOM RECESSED

Adjustable beam angles lens: from 10° to 40°.  
For recessed installation.

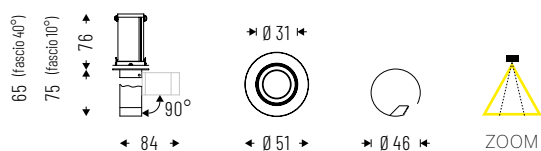

IP 40

Cod. 4000K	Led	lm	Ømm
14ZM3K4NR	3W	262	51
14ZM7K4NR	7W	560	51

Cod. 3000K	Led	lm	Ømm
14ZM3K3NR	3W	238	51
14ZM7K3NR	7W	510	51

DOWNLIGHT

## TERES MICRO ZOOM RECESSED FRAMELESS

Adjustable beam angles lens: from 10° to 40°.  
For recessed frameless installation.






IP 40

Cod. 4000K	Led	lm	Ømm
14ZM3K4NF	3W	262	31
14ZM7K4NF	7W	560	31

Cod. 3000K	Led	lm	Ømm
14ZM3K3NF	3W	238	31
14ZM7K3NF	7W	510	31

# TERES MICRO ZOOM RECESSED 2x

Double adjustable beam angles lens: from 10° to 40°.  
For recessed installation.



IP 40

Cod. 4000K	Led	lm	mm
14ZM23K4NR	2X3W	524	53x93
14ZM27K4NR	2X7W	1120	53x93

Cod. 3000K	Led	lm	mm
14ZM23K3NR	2X3W	476	53x93
14ZM27K3NR	2X7W	1020	53x93

## TECHNICAL NOTES

### ADJUSTMENT AND AIMING

FULLY RECESSED POSITION



AIMING AND ZOOM POSITION

