

UPLIK is a wall mounting fixture that, with its **simple and clean lines** fits perfectly in any environment. The **different emissions, power, sizes** and bright packages offer a very **wide range of solutions** to meet any lighting requirement. UPLIK is also available in the floor version for lighting in working environments thanks to DPL technology diffuser with UGR<19.

☑ Features

- Direct emission
- Direct/indirect emission
- UGR<19; <22
- IP 40

💡 Led

- 3000K/4000K
- >85 lm/W
- CRI>90
- Eye safety: RG0/RGI
- Mac Adams 3
- L80/B20 >80.000h

🕒 Specifications

- Built-in driver
- PG diffuser for homogeneous emission UGR<22
- Diffuser with Indirect Light Control (ILC) technology, to favor indirect lighting
- DPL technology diffuser, with controlled UGR<19 for floor version
- Double emission: direct/indirect

☐ Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 - code B

☆ Certifications

- CE Conformity
- RETILAP Conformity
- For version LP - HP energy efficiency C
- For version XP energy efficiency D
- 5 years warranty

📦 On request


- DALI - code D*
- Emergency 1hr - code EM
- Emergency 3 hrs - code EM3H*
- 2700K - code K27*
- 5000K - code K5*

* Where available



UPLIK WALL MINI

Methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology for partially indirect emission.




Cod. 4000K	Led	lm	Lmm
76DRI2K4	12W	1008	175

Cod. 3000K	Led	lm	Lmm
76DRI2K3	12W	984	175

UPLIK WALL MINI DOUBLE EMISSION

Lower methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.




Cod. 4000K	Led	lm	Lmm
76DII2K4	12W	1044	175

Cod. 3000K	Led	lm	Lmm
76DII2K3	12W	1008	175

UPLIK WALL SMALL

Methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology for partially indirect emission.





Cod. 4000K	Led	lm	Lmm
76DR24K4HPS	24W	2016	315
76DR48K4XPS	48W	4080	315

Cod. 3000K	Led	lm	Lmm
76DR24K3HPS	24W	1968	315
76DR48K3XPS	48W	3984	315

UPLIK WALL SMALL DOUBLE EMISSION

Lower methacrylate satin antistatic diffuser screen, UGR<22.

Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.



IP 40

Cod. 4000K	Led	lm	Lmm
76DI48K4XPS	48W	4224	315

Cod. 3000K	Led	lm	Lmm
76DI48K3XPS	48W	4080	315

UPLIK WALL MEDIUM

Methacrylate satin antistatic diffuser screen, UGR<22.

Indirect Light Control (ILC) technology for partially indirect emission.



IP 40

Cod. 4000K	Led	lm	Lmm
76DR24K4M	24W	1968	590
76DR48K4HPM	48W	4032	590
76DR62K4XPM	62W	5270	590
76DR96K4XPM	96W	8160	590



Cod. 3000K	Led	lm	Lmm
76DR24K3M	24W	1920	590
76DR48K3HPM	48W	3936	590
76DR62K3XPM	62W	5146	590
76DR96K3XPM	96W	7968	590

WALL
FLOOR

UPLIK WALL MEDIUM DOUBLE EMISSION

Lower methacrylate satin antistatic diffuser screen, UGR<22.

Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.

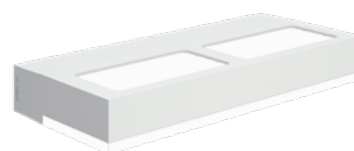

IP 40

Cod. 4000K	Led	lm	Lmm
76DI62K4XPM	62W	5332	590
76DI96K4XPM	96W	8256	590

Cod. 3000K	Led	lm	Lmm
76DI62K3XPM	62W	5146	590
76DI96K3XPM	96W	7968	590

UPLIK WALL LONG

Methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology for partially indirect emission.



Cod. 4000K	Led	lm	Lmm
76DR36K4L	36W	2952	870
76DR72K4HPL	72W	6048	870

Cod. 3000K	Led	lm	Lmm
76DR36K3L	36W	2880	870
76DR72K3HPL	72W	5904	870

UPLIK WALL LONG DOUBLE EMISSION

Lower methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.




Cod. 4000K	Led	lm	Lmm
76DI93K4XPL	93W	7568	870
76DI144K4XPL	144W	12104	870

Cod. 3000K	Led	lm	Lmm
76DI93K3XPL	93W	7119	870
76DI144K3XPL	144W	11052	870

UPLIK FLOOR

Diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission.

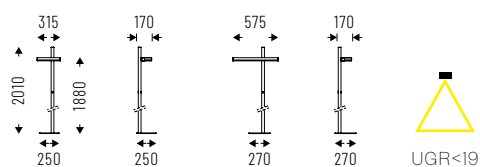


IP 40

Cod. 4000K	Led	lm	Lmm
76DPL48K4D	48W	3880	315
76DPL96K4D	96W	7776	575

Cod. 3000K	Led	lm	Lmm
76DPL48K3D	48W	3840	315
76DPL96K3D	96W	7680	575

UPLIK FLOOR DOUBLE EMISSION

Lower diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission. Upper PG protective diffuser for dual emission: direct/indirect.

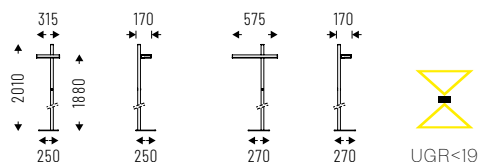

IP 40

Cod. 4000K	Led	lm	Lmm
76DI48DPLK4D	48W	3984	315
76DI96DPLK4D	96W	7968	575


Cod. 3000K	Led	lm	Lmm
76DI48DPLK3D	48W	3936	315
76DI96DPLK3D	96W	7872	575

UPLIK FLOOR TWIN

Diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission.



WALL FLOOR

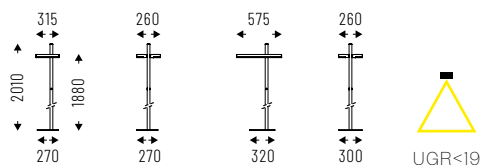


IP 40

Cod. 4000K	Led	lm	Lmm
76DPL96K4TD	96W	7776	315
76DPL192K4TD	192W	15552	575

Cod. 3000K	Led	lm	Lmm
76DPL96K3TD	96W	7680	315
76DPL192K3TD	192W	15360	575

UPLIK FLOOR TWIN DOUBLE EMISSION

Lower diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission. Upper PG protective diffuser for dual emission: direct/indirect.

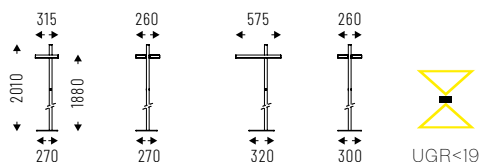


IP 40

Cod. 4000K	Led	lm	Lmm
76DI96DPLK4TD	96W	7968	315
76DI192DPLK4TD	192W	15936	575

Cod. 3000K	Led	lm	Lmm
76DI96DPLK3TD	96W	7872	315
76DI192DPLK3TD	192W	15774	575

UPLIK FLOOR TWIN INTELLIGENT

Diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission.

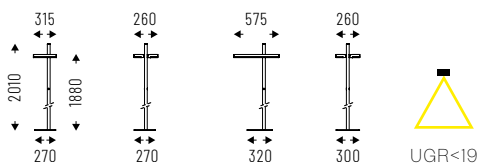


IP 40

Cod. 4000K	Led	lm	Lmm
76DPL96K4TI	96W	7776	315
76DPL192K4TI	192W	15552	575

Cod. 3000K	Led	lm	Lmm
76DPL96K3TI	96W	7680	315
76DPL192K3TI	192W	15360	575

UPLIK FLOOR TWIN INTELLIGENT DOUBLE EMISSION

Lower diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission. Upper PG protective diffuser for dual emission: direct/indirect.

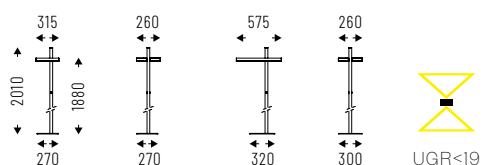

IP 40

Cod. 4000K	Led	lm	Lmm
76DI96DPLK4TI	96W	7968	315
76DII92DPLK4TI	192W	15936	575

Cod. 3000K	Led	lm	Lmm
76DI96DPLK3TI	96W	7872	315
76DII92DPLK3TI	192W	15744	575